



AVR-1200-U avtomatty kerney turaqtandyrғыshy



PAIDALANÝSHYNYŇ BASSHYLYGÝ

Osy basshylyqty oqyńyz jáne saqtanyz!

Osy ónimdi tańdaǵanyńyz úshin alǵys aitamyz. Basshylyq turaqtandyrғыshy ornatý, tehnikalyq qyzmet kórsetý jáne paidalaný barysynda qadaǵalaý qajet mańyzdy nusqaýlyq retinde usynylady. Qurylyǵymen máselelerdiń týyndaýy jaǵdaıynda klientterge servistik qyzmet kórsetý qyzmetine qońyraý shalmas buryn basshylyqty muqiat oqyp shyǵyńyz. SVC ónimimen qatar modeldikpen egjer-tegjer tanyсы úshin resmı saıttardy qarańyz:

svc.kz, svc.kg, svc-power.ru.


Mazmuny

1. Airyqshalyqtary
2. Qurylgynyń syrtqy túriniń sapaty
3. Tehnikalyq sıpattamalary
4. Qaýıpsızdik tehnikasy jónindegi nusqaýlyq

1. Airyqshalyqtary:

- 1.1 Júktemeni qosýǵa arnalǵan alty rozetka:
- Kiris kerneydi turaqtandyryy bar 3 rozetka;
- 3 rozetki s funktsiyei setevogo fil'tra.
- 1.2 Kiris kerneydiń avtomatty turaqtanyy.
- 1.3 Telefon jelisin qorǵay.
- 1.4 Asyra júkteyden qorǵay.
- 1.5 Qolailiy vizýaldy indikatorlary.

2. Qurylgynyń syrtqy túriniń sapaty

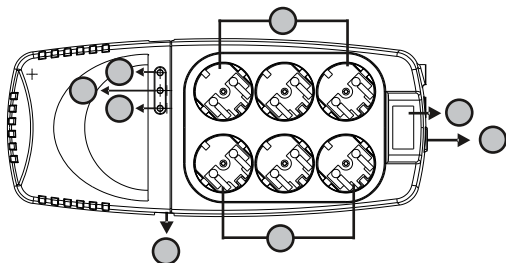

- | | |
|--|---|
| ① ON/OFF qosý túimesi | ● Kiris kerneydi turaqtandyryy qyzmeti bar shyǵys aýytpalar |
| ● ON indikatory
(Shyǵys aýytpalarǵa qýat kózi beriledi) | ● Jelilik súzgi qyzmeti bar shyǵys aýytpalar |
| ● Boost indikatory
(tómen kerney turaqtandyryshy) | ● Telefon jelisin qorǵay |
| ● Buck indikatory
(joǵary kerney turaqtandyryshy) | ⑧ Qýat kózi kabeli |

3. Tehnikalyq sıpattamalary

Úlgisi	AVR-1000-U
Qýattylyǵy, BT	600
Qýattylyǵy, BA	1200
Kiris kerney	220 V
Kiris jiiligi	50-60 Gs
AVR jumys diapazony	176-273 V
Shyǵys kerneyi	220B+/-10%
Shyǵys aýytpalardyń tipi jáne sany	3 x Schuko AVR qyzmetimen birge + 3 x Schuko Jelilik súzgi qyzmetimen birge
Telefon jelisin qorǵay	RJ-11 / RJ-45
ON/OFF qýat kóziniń indikatory	Jasyl indikator
Boost indikatory	Sary indikator
Buck indikatory	Sary indikator
ExBxT, mm	117 x 83 x 208
Jumys temperatýrasy jáne ylgaldylyǵy	0-40°C, 0-95% (Kondensasiyasyz)
Shý deńgeii	40dB kem

4. Qaýıpsızdik tehnikasy jónindegi nusqaýlyq

- 4.1 Aspatty qabyrǵadan keminde 100 mm qashyqtqta jaqsy jelditiletin jerge ornalastyryńyz.
- 4.2 Elektr ótkizgish materialdardy turaqtandyryshqa qoımańyz, bul qysqa tuyyqtalǵa ákeliy múmkin.
- 4.3 Turaqtandyryshy qandaı da bir materialdarmen jabýǵa, onda aspatty men zattardy ornalastyryǵa, jeldetkish tesikterin jabýǵa tyıym salynady.
- 4.4 Tútin nemese órt paida bolǵan kezde derey turaqtandyryshy toktan ajyratyp, servis-ortalyqqa habarlasıyńyz.
- 4.5 Elektr togymen zaqymdanıdy boldyрмаy úshin turaqtandyryshy ashańyz.
- 4.6 Turaqtandyryshyń shamadan tys júkteliyine jol bermeńiz.
- 4.7 Órt shyqqan jaǵdaıda untaqtıy órt sóndirgishti paidalanyńyz.



NAZAR AÝDARYÑYZ!

Turaqtandyryshyń bul seriesy derbes tehnikalyq qyzmet kórsetıdi qajet etpeidi.

Eger turaqtandyryshpen problemalar týyndasa, servis ortalyǵyna habarlasıyńyz. Jabdyqty óz betimen jóndeyge tyryspańyz.